

REMARKS

The Applicants respectfully request that the foregoing amendments be made prior to examination of the present Application.

In the Specification, a Substitute Specification under 37 C.F.R. § 1.125 has been provided to replace the originally filed specification for clarity. No new matter has been added.


Original Claims 1-13 have been amended and are now pending in this Application. New Claims 14-17 have been added to provide claims of varying scope. Claims 1 and 14 are in independent form.

The Applicants believes that the present Application is now in condition for allowance. Favorable consideration of Claims 1-17 is respectfully requested.

The Examiner is invited to contact the undersigned by telephone if the Examiner believes that a telephone interview would advance the prosecution of the present Application.

Respectfully submitted,

Date SEPTEMBER 20, 2005 By

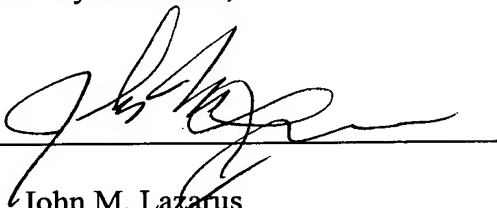

FOLEY & LARDNER LLP
Customer Number: 26371
Telephone: (414) 297-5591
Facsimile: (414) 297-4900

John M. Lazarus
Attorney for the Applicants
Registration No. 48,367

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION**Locking Device and Headrest****Cross Reference to Related Applications**

[0001] The present Application claims the benefit of priority to the following International Application: PCT Patent Application No. PCT/EP2004/002701 titled "Locking Device and Headrest" and filed on March 16, 2004, which claims priority to German Patent Application No. DE10312517.5 titled "Locking Device and Headrest" and filed on March 20, 2003 (which are both incorporated by reference in their entirety).

Description**Field**

[0002] The invention relates to a locking device ~~according to the precharacterizing clause of claim 1.~~ For motor vehicles, in particular, headrests are used which provide a user of the vehicle with increased comfort and increased security against possible sources of risks, for example in the case of accidents, by ~~means of a supporting or retaining function of body parts, in particular of the head.~~

Background

[0003] Headrests of this type are generally provided in a manner such that they can be set ~~in order to be able to be adapted,~~ for example, to users of different heights. In order to set the headrests, the latter can be locked mechanically in a plurality of positions. The setting of the headrests is ~~to be possible~~ accomplished easily, simply and with little effort. At the same time, however, once a headrest is set and locked, ~~as good locking as possible against resistance to~~ forces which ~~will~~ may potentially move the headrest out of the set position is ~~to be ensured~~ desired. Headrests of this type and the individual parts of which they are composed are furthermore to be able to be produced and assembled simply and cost-effectively, with the result that the production of headrests of this type can be carried out simply, rapidly and cost-effectively.

[0004] For example, European patent specification EP 0 864 461 B1 discloses a headrest for motor vehicle seats with a rapid height adjustment.. In this case, two wire springs

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION

are provided which can be bent by at least one actuating rod, so that the locking brought about by the two wire springs in their normal position is canceled. However, in the case of such a construction of a headrest, it is disadvantageously envisaged using two separate springs. Furthermore, special C-shaped springs are used which can only be fitted in a comparatively time-consuming manner, in a comparatively complicated manner and with a comparatively large exertion of force. Furthermore, the two springs used have a different locking effect, for example due to manufacturing fluctuations. On account of the use of two separate springs and two separate retaining rods, this has the effect of the support being possibly able to be positioned in different adjusting positions, i.e., for example, "obliquely", on the different retaining rods, which may result in disadvantageous consequences, in particular with regard to protecting occupants in motor vehicles in hazardous situations.

Summary

[0005] The invention is therefore ~~based on the object of providing~~ provides a locking device in which the disadvantages ~~occurring in the case of~~ the locking devices known from the prior art are avoided.

[0006] ~~This object is achieved according to~~ Accordingly the invention by a locking device ~~which~~ is provided in a manner such that it can be adjusted relative to at least two retaining rods, the locking device having spring elements means which are provided in a manner such that they can be set at least into one locking position, the spring elements means in their locking position, in interaction with recesses in the retaining rods, causing the locking device to be locked relative to the retaining rods, the spring elements means being provided in such a manner that ~~the locking of the at least two~~ retaining rods can be brought about by a mechanical fixing of the spring elements means in a central region or ~~that the locking of the at least two~~ retaining rods can be brought about by an application of force on the spring elements means in a central region. In one ~~preferred~~ embodiment of the locking device, the spring elements means ~~are provided as a spring~~ are provided as a single part. In a further ~~preferred~~ embodiment of the locking device, the spring elements means ~~are provided as a~~ spring extending in an elongate manner essentially between the two retaining rods. In a further ~~preferred~~ embodiment of the locking device, the spring elements means ~~are provided~~

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION

in such a manner that they comprise at least one central part and end parts. Such locking devices ~~according to the invention~~ have the advantage that the spring elements means have a uniform locking effect on both retaining rods, since the locking effect for the alternative of exerting a force on the spring elements means in the central region - in contrast to merely fixing the spring elements means without a noticeable application of force on the spring elements means - is brought about ~~in particular~~ by a single elastic deformation of the spring elements means, in particular in the central region of the spring elements means.

[0007] In a ~~further preferred~~ another embodiment of the locking device ~~according to the invention~~, the spring elements means, in addition to their locking position, are provided in a manner such that they can be set into a release position, the spring elements means interacting with the recesses of the retaining rods in such a manner that, when the spring elements means are set in their release position, the recesses are opened up. In a further ~~preferred~~ embodiment of the locking device ~~according to the invention~~, the latter has a sliding element which can be set at least in a first position and in a second position, the spring elements means interacting with the sliding element in such a manner that, when the sliding element is set into its first position, the spring elements means take up their locking position and that, when the sliding element is set into its second position, the spring elements means take up their release position. In a further ~~preferred~~ embodiment of the locking device ~~according to the invention~~, the sliding element has a plurality of projections and the spring elements means have a plurality of actuating regions, a movement of the sliding element parallel to a plane defined by the at least two retaining rods bringing about a movement of the actuating regions which is essentially vertical thereto. In a further ~~preferred~~ embodiment of the locking device ~~according to the invention~~, the spring elements means are elastically deformed by the movement of the actuating regions. In a further ~~preferred~~ embodiment of the locking device ~~according to the invention~~, the actuating regions are of wedge-like design. In a further ~~preferred~~ embodiment of the locking device ~~according to the invention~~, the locking device has a bearing point, the bearing point preventing a movement of the central region of the spring elements means during the movement of the actuating regions. Such locking devices ~~according to the invention~~ have the advantage of being able to be produced and fitted in a very simple and sturdy manner.

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION

[0008] A further subject matter of the present invention is a headrest which is used, in particular, in a motor vehicle. ~~According to the invention, t~~The headrest here is connected fixedly to a locking device ~~according to the invention~~. In particular, the design of the headrest ~~according to the invention means~~ is such that the locking device ~~according to the invention~~ cannot be seen at all from outside the headrest or at most partially, for example through an actuating device. In this case, the headrest has, ~~in particular,~~ a frame which has guide elements for retaining rods or is connected thereto. The retaining rods protrude in particular out of the upper boundary surface of a backrest of a seat of a motor vehicle, ~~with the result that, with the~~ so that by setting of the backrest in a manner such that it is generally essentially vertical or is inclined slightly in relation to the vertical, the retaining rods are essentially vertical or likewise slightly inclined in relation to the vertical. ~~Accordingly to the invention,~~ the headrest is therefore height-adjustable with the retaining rods extending essentially vertically.

Brief Description of the Figures

[0009] The invention is explained in more detail below with reference to an exemplary embodiment which is illustrated in the drawing, in which

- Figure 1 shows a headrest ~~according to the invention~~ with retaining rods and an indicated locking device, according to the invention,
- Figure 2 shows part of a headrest ~~according to the invention~~ with the locking device indicated, ;
- Figure 3 shows an exploded drawing of individual parts of the headrest ~~according to the invention~~ and in particular of the locking device ~~according to the invention,~~ ;
- Figure 4 shows a plan view in the direction of the retaining rods of the locking device ~~according to the invention,~~ with the spring ~~means~~ being situated in their its locking position, ~~and,~~ ;
- Figure 5 shows a plan view in the direction of the retaining rods of the locking device ~~according to the invention,~~ with the spring ~~means~~ being situated in their its

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION

release position.

Detailed Description

[0010] Figure 1 illustrates a headrest 10 ~~according to the invention~~ with retaining rods 20 and an indicated locking device ~~according to the invention which is not, however, denoted by a reference number~~. The retaining rods 20 here are fastened by their lower part 21 in particular in a backrest (not illustrated) of a seat of a motor vehicle. ~~According to the invention, t~~The headrest 10 has, ~~in a manner known from the prior art~~, a comparatively soft material which is denoted by the reference number 11, which makes up the major part of the volume of the headrest 10 and serves for supporting and stabilizing ~~in particular~~ the head of a user of the headrest.

[0011] Figure 2 illustrates part of a headrest 10 ~~according to the invention~~ with the locking device ~~indicated~~. In this case, the headrest 10 comprises, ~~in particular~~, a frame 15 which ~~is likewise known from the prior art and~~ gives the headrest an inherent mechanical support. Figure 2 furthermore illustrates the retaining rods 20, their recesses 22 and their lower parts 21. ~~According to the invention, the recesses~~ Recesses 22 are provided in particular as notches 22. Furthermore, figure 2 illustrates the spring elements ~~means~~ 30. The spring elements ~~means~~ 30 are provided ~~in particular~~ as a spring 30 extending in an elongate manner between the retaining rods 20. In one ~~preferred~~ embodiment of the invention, the spring 30 is provided ~~in particular~~ as a single part ~~by means~~ formed of spring wire. In another ~~preferred~~ embodiment of the invention, the spring 30 is provided in a central section, which is formed by a central part, as a plastic part and is provided in its end sections as a metal end part or as a plurality of metal end parts.

[0012] Figure 3 illustrates an exploded drawing of individual parts of the headrest 10 ~~according to the invention~~ and in particular of the locking device ~~according to the invention~~. The headrest 10 comprises the frame 15 and guides 17 in which the retaining rods 20 are guided. ~~According to the invention, the~~ The locking device has a support part 50 which bears the components required for locking the locking device relative to the retaining rods 20, and is at least partially mechanically fixed. ~~According to the invention, the~~ The support part 50 is connected in particular to the guides 17 and is provided as a single part with them, for

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION

example as a plastic or metal injection-molded part. The spring 30 and a sliding element 40 are placed onto or into the support part 50, with both the spring 30 and the sliding element 40 being provided in a manner such that they can be moved mechanically within limits in or on the support part 50. The support part 50 has - connected as a single part in figure 3 - a receptacle 54 for an actuating device 70. However, ~~according to the invention,~~ a receptacle 54 (not illustrated) which is not provided as a single part with the support part 50 is likewise possible. ~~According to the invention, the~~ The actuating device 70 ~~is realized, in particular, by means of~~ includes an actuating guide 60, a restoring spring 62 and an actuating button 64. ~~In this case, the~~ The actuating button 64 is connected mechanically to the sliding element 40, ~~in particular by means of a latching connection,~~ and is accessible to a user (not illustrated in figure 3) of the locking device from outside the headrest 10. However, ~~according to the invention,~~ a different design of the actuating device 70 and a different connection of the sliding element 40 to a component of the actuating device 70 that is accessible to the user of the locking device is likewise possible.

[0013] Figure 4 illustrates a plan view of the locking device ~~according to the invention~~ in the direction of the retaining rods 20, with the spring ~~means~~ 30 being situated in ~~their~~ its locking position, and figure 5 illustrates a plan view of the locking device ~~according to the invention~~ in the direction of the retaining rods 20, with the spring ~~means~~ 30 being situated in ~~their~~ its release position. The locking position of the spring 30 is characterized in that locking regions 31 of the spring 30 bear against the retaining rods 20. In this case, the sliding element 40 is set in a first position. ~~According to the invention, this~~ This position is brought about in particular by the spring action of the restoring spring 62 (not illustrated in figures 4 and 5 ~~for the sake of simplicity~~) of the actuating device 70 on the actuating button 64 and therefore on the sliding element 40. ~~According to the invention, the~~ The sliding element 40 has projections 42, 43 which can lead to a movement of the spring 30 during a movement of the sliding element 40. The first position of the sliding element 40, ~~which position is~~ illustrated in figure 4, is characterized in that the projections 42, 43 ~~at most~~ bear against the spring 30 but do not exert a force on the spring. The exertion of such a force would impair the locking effect of the spring 30 on the retaining rods 20. In the exemplary embodiment illustrated, the locking regions 31 are provided in particular at the two ends of

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION

the spring 30 extending in an elongate manner. The locking of the retaining rods 20 relative to the locking device or relative to the headrest 10 is brought about ~~here~~ by ~~the fact that~~ the locking regions 31 of the spring 30 ~~engage in~~ engaging the recesses 22 (not illustrated in figures 4 and 5) of the retaining rods 20. In this case, ~~it is provided according to the invention both that~~ the spring 30 is already "prestressed" in its locking position and an application of force of the spring 30 on the retaining rods 20 is therefore provided.

~~According to the invention, this~~ This application of force of the spring 30 is brought about ~~in particular~~ by a bearing point 52 which is provided on the support part 50. In this connection, the support part 50, by means of the bearing point 52, exerts an application of force on the spring 30, ~~in particular~~ in a central region 35 of the spring 30. This causes an elastic bending of the spring 30, ~~in particular~~ in its central region 35, and therefore an ~~identical~~ exertion of force on both retaining rods 20 or on their recesses 22. ~~According to the invention, the~~ The central region 35 of the spring 30 is provided ~~in particular~~ approximately in the center between the retaining rods 20, but this is not necessarily the case ~~according to the invention~~.

[0014] In ~~an alternative~~ another embodiment ~~of the invention~~, the spring 30 bears merely against the two retaining rods 20 and the bearing point 52. By ~~means of~~ the mechanical fixing of the spring 30 on the bearing point 52 - ~~according to the invention in particular~~ in the central region 35 - ~~in the case of the alternative embodiment~~, locking of the locking device relative to the retaining rods 20 is already provided. It is clear that, in the case of locking without application of force in the locking position of the spring 30, the ability to fit the spring 30 is facilitated, ~~but this is associated with a slightly less good locking~~.

[0015] The release position (illustrated in figure 5) of the spring 30 is characterized in that the locking regions 31 of the spring 30 release the retaining rods 20 and therefore open up the recesses 22, i.e. the locking regions 31 of the spring 30 are provided at a distance from the retaining rods 20. As a result, it is possible for the retaining rods 20 to be easily displaceable in their longitudinal direction, i.e. perpendicular with respect to the plane of the drawing in figures 4 and 5, in relation to the locking device. ~~According to the invention, the~~ The release position of the spring 30 is brought about, starting from its locking position, ~~in particular~~ by ~~the fact that~~ the sliding element 40 is being brought into its second position illustrated in figure 5. In this case, the sliding element 40 is displaced to the left, starting

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION

from its position in figure 4, relative to the support part 50, and the projections 42, 43 on the sliding element 40 together with wedge-like actuating regions 32, 33 of the spring 30 bring about a movement of the spring 30 into its release position. In this case, ~~in particular~~, the locking regions 31 of the spring 30 move in a direction perpendicular with respect to the direction of movement of the sliding element 40. The movement of the sliding element 40 takes place here in a plane parallel to the plane which is perpendicular to the plane of the drawing in figure 5 and is defined by the two retaining rods 20.

[0016] In ~~the~~ an alternative embodiment, in which the spring 30 is provided in a central section, which is formed by a central part, as a plastic part and with the spring being provided in its end sections as a metal end part or as a plurality of metal end parts, the ~~invention makes provision in particular for~~ embodiment contemplates that the end parts ~~to~~ form the locking regions 31 and ~~for the central part to form~~ forms the remaining sections of the spring 30, in particular the actuating regions 32, 33.

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION

List of reference numbers:

- 10 ——— Headrest
- 11 ——— Material of the headrest
- 15 ——— Frame
- 17 ——— Guides
- 20 ——— Retaining rods
- 21 ——— Lower part of the retaining rods
- 22 ——— Recesses
- 30 ——— Spring means
- 31 ——— Locking regions
- 32, 33 ——— Actuating regions
- 35 ——— Central region
- 40 ——— Sliding element
- 42, 43 ——— Projections
- 50 ——— Support part
- 52 ——— Bearing point
- 54 ——— Receptacle
- 60 ——— Actuating guide
- 62 ——— Restoring spring
- 64 ——— Actuating button

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION

70 — ~~Actuating device~~

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION

~~Locking device and headrest~~

~~Patent claims~~

What is claimed is:

[The claims are provided in the listing of claims shown in the preliminary amendment filed herewith]

MARKED UP VERSION OF SUBSTITUTE SPECIFICATION**Abstract**

~~The invention relates to a~~ A locking device and a headrest are disclosed (10). The locking device ~~comprises~~ includes spring elements (30), which can be engaged in at least one locking position and ~~said~~ the locking device can be displaced in relation to at least two retaining bars (20) that have a large number of recesses (22). The spring elements (30) co-operate with the recesses (22) in such a way that the engagement of the spring elements (30) in their locking position locks the locking device in relation to the retaining bars (20). According to the invention, the spring elements (30) are configured in such as way that the retaining bars (20) are locked by the mechanical fixing of the spring elements (30) in their central zone (35) or by exertion of a force on the spring elements (30) in their central zone (35).